


Data Sheet

Type Number: 6237
 Designation IEC: ---
 System: Li-Manganese dioxide /
 Organic Electrolyte
 UL Recognition: MH 13654 (N)
 Nominal Voltage [V]: 3
 Typical Capacity C [mAh]: 1350
 Load 1.0 kOhm, at 20 °C down to 2.0 V

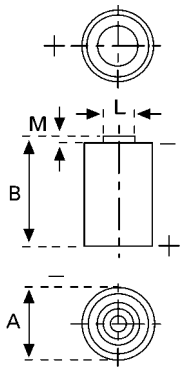

Weight, approx [g]: 15
 Volume [ccm]: 5,6
 Coding: Date of Manufacturing
 Quarter/Year

Temperature Ranges [°C]:

	min.	max.
Storage:	-55	75
Discharge:	-30	75

Dimensions [mm]:

	min.	max.
Diameter [A]:	14,45	14,75
Height [B]:	33,1	33,5
Shoulder Diameter[L]:	7	
Shoulder Height [M]:	0,6	

Segment: Electronic

Main Applications: Watch
 Photo
 Electronic

Typical Capacities (at 20° C):

Discharge Type:	Load	End Voltage:	2.0 V
Continuous	1000	Ω Time:	500 h
24h/d,7d/w		Capacity [mAh]:	1350
Current [µA]:		Energy [mWh]:	3600