


# TYPE: H750-F6 Nickel Metal Hydride Cell

## Specifications of single cell

Nominal voltage		1.2V	
Capacity		0.2CA	1.0CA
		Discharge	Discharge
	Typical	310min	58min
	Minimum	300min	54min
Dimensions		mm	
	Height	48.0 <sup>-1.0</sup>	
	Width	17.0 <sup>-0.5</sup>	
	Thickness	6.1 <sup>-0.5</sup>	
Weight(Approximately)		gram	
		17.5	
Internal Impedance	At 1000 Hz	≤28mΩ ( After Charge )	
Charge	Standard	75mA(0.1CA) × 16h	
	Rapid	750mA(1.0CA) × 1.2h	
Ambient temperature		°C	
	Charge	standard	0°C to 45°C
		Rapid	10°C to 40°C
	Discharge		-20°C to 65°C
Storage		-20°C to 45°C	

## Dimensions with tube

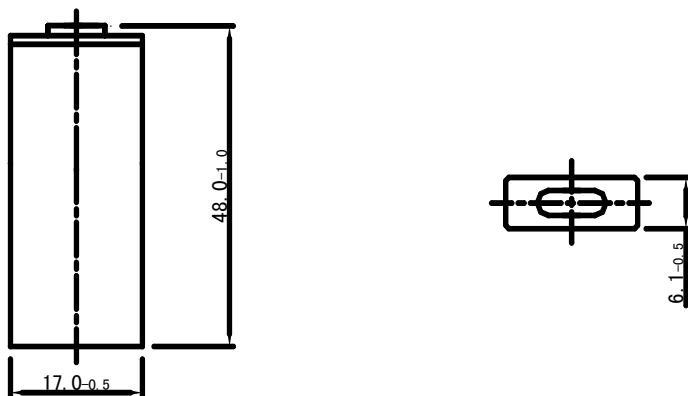

## Note:

1. Nominal capacity, rated at 0.2CA 20°C.
2. Average capacity, for reference only.
3. Weight and internal impedance are For reference only.
4. Standard according as IEC of test cycle life.

● Subject to be modified without prior notice.

## Typical characteristics

