

MODEL TL-5276/W



For Utility Metering Memory Back-up Applications

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




- Nominal capacity @ 1 mA, to 2V 1.0 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 50 mA
- Maximum pulse current capability 100 mA
- Enclosure Lexan 143 UV stable
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

TADIRAN LITHIUM BATTERIES

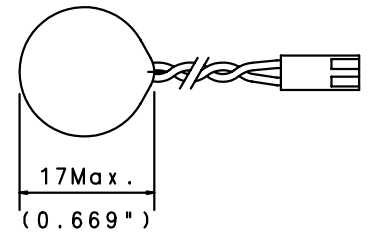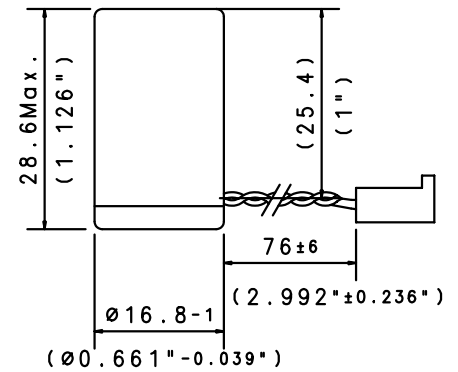

ADDITIONAL INFORMATION

CONNECTOR TYPE METHOD IDC 1308-102-426
CATALOUGE NO. 15-5276-30000

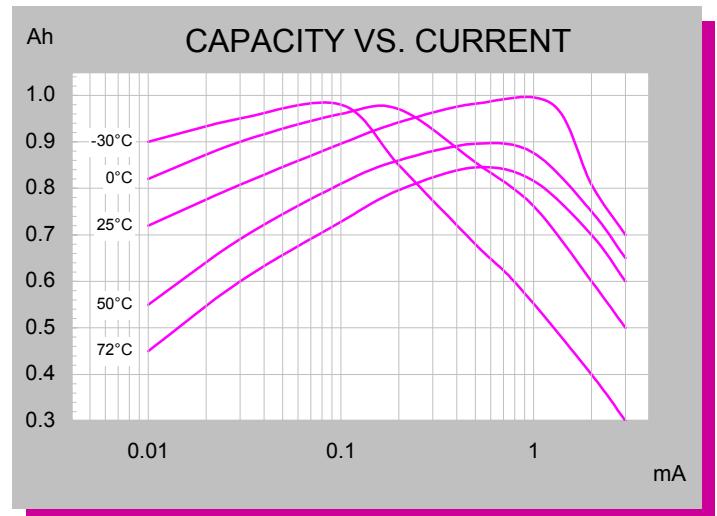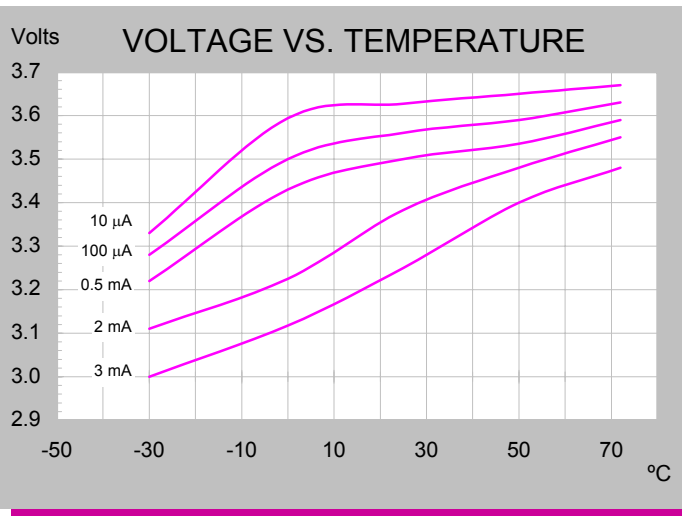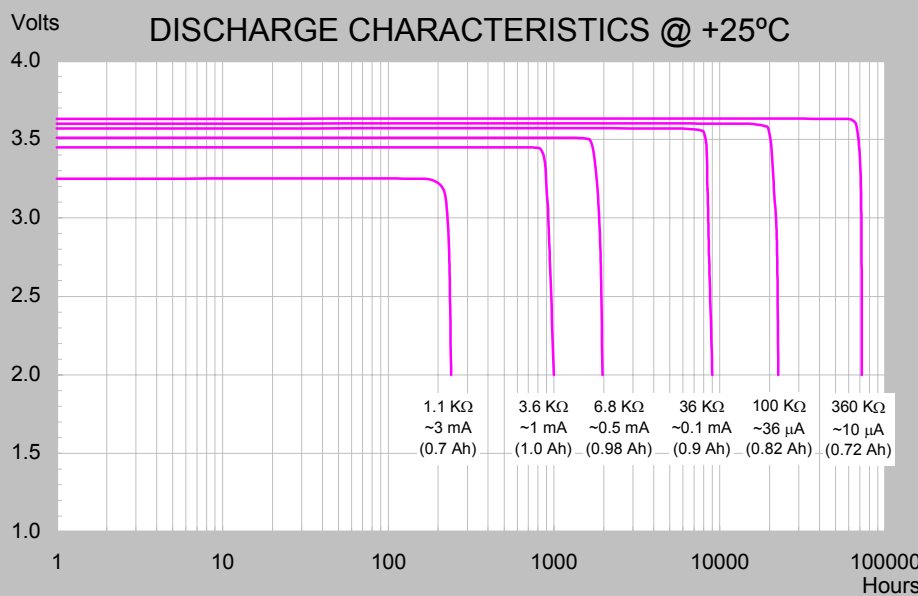

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. C 10/03