


TENTATIVE

Cell Type UF553450Z

Specifications

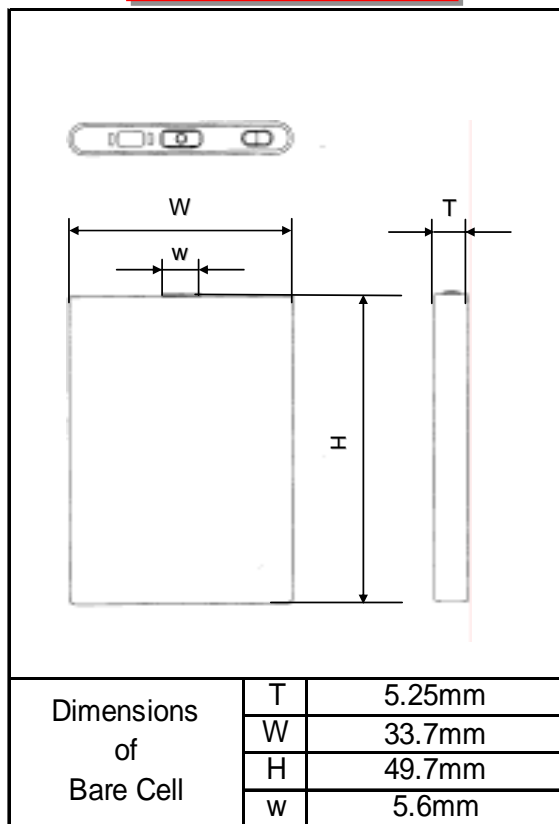

Discharged State after Assembling

Nominal Capacity		Min.1100mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std. 1100mA
Charging Time		2.5hrs.
Ambient Temperature	Charge	0 ~ +40
	Discharge	-20 ~ +60
	Storage	-20 ~ +50
Weight (Max.)		T.B.D
Dimensions (Max.)	(T)*	5.40mm
	(W)	33.85mm
	(H)	50.00mm
Volumetric Energy Density		445Wh/l
Gravimetric Energy Density		T.B.D.

*The maximum thickness of the standard shipment charging condition

*When designing a battery pack, get the precise information on a cell battery drawing