


Sealed Nickel-Metal Hydride Rechargeable Batteries

Model:NH-2000AA



Specifications

Nominal Voltage		1.2 Volt
Rated Capacity		2000 mA
Dimensions	Diameter in. (mm)	0.56 (14.1)
	Height in. (mm)	1.89 (48.0)
	Height with solder tabs	1.93 (49.0)
Weight	Weight Approx.	29 gm
	Internal Resistance	<28 mΩ
	Standard Charge (0.1C)	200 mA
	Trickle Charge	(0.03C)~(0.05C)
	Fast Charge	1000 mA
Recommended Operating Temperature Range	Std/Trickle Charge	20±5°C
	Fast Charge ΔV	20±5°C
	Discharge	20±5°C
	Storage	-20°C to 45°C
Standard Discharge (0.2C) Cut Off Voltage		1.0V per cell
High Rate Discharge (1 C) Cut Off Voltage		1.0V per cell



Dimensions

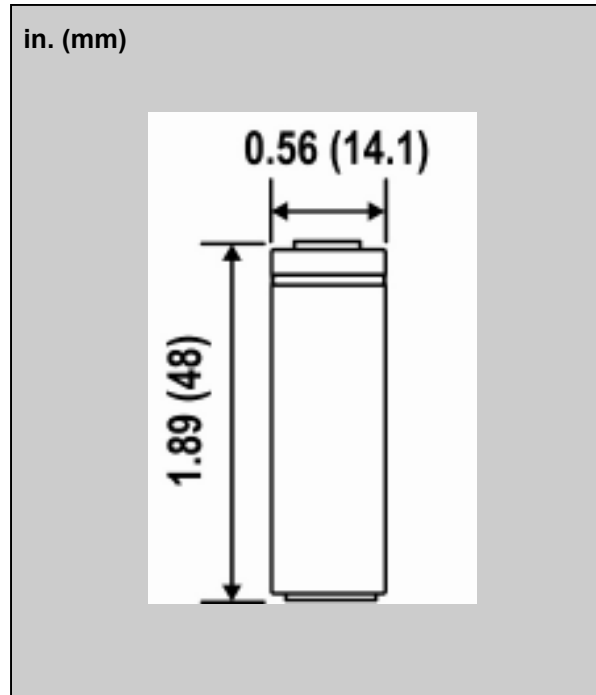

Charging and Discharging Characteristics

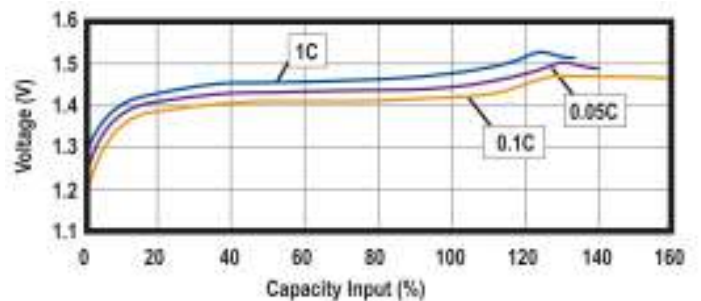
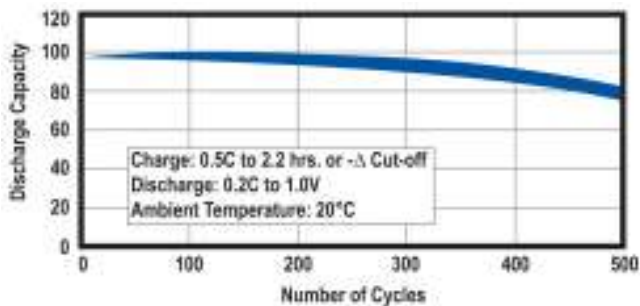


Discharge Cycle Life Standard Charge

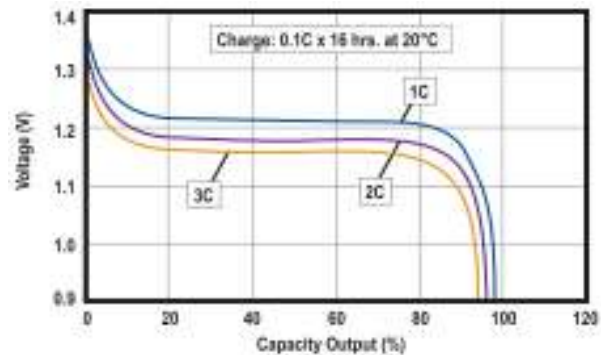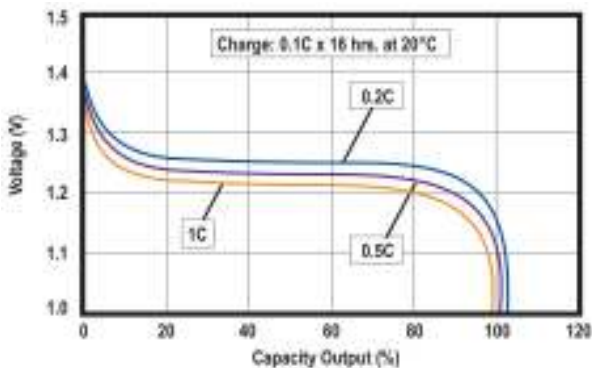



Standard Battery Discharging (0.2C/0.5C/1C) Standard Battery Discharging (1C/2C/3C)

Please note the following graphs are for High Temperature and High Power batteries. These batteries do not form part of our standard range, but both types are available on request subject to minimum order quantities and delivery times. Please contact us for further details.

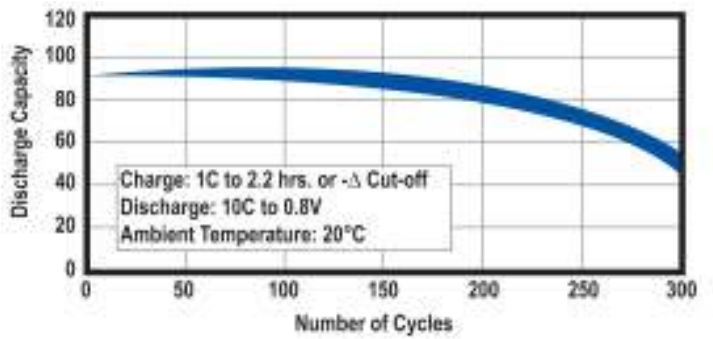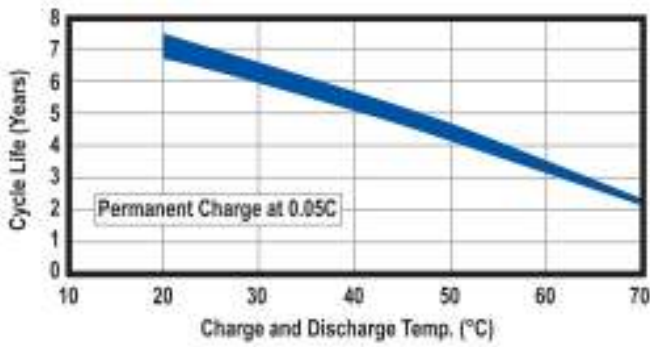


High Temp. Battery Charging and Discharging

High Power (10C Discharge) Cycle Life

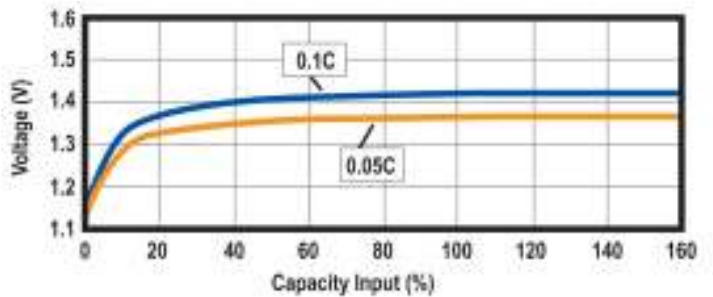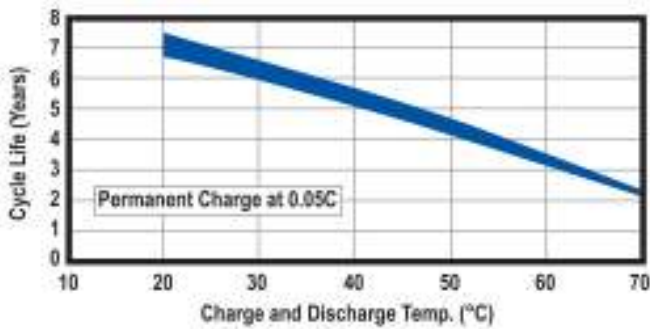

High Temp. Battery Discharge Cycle Life

High Temp. Battery Trickle Charge

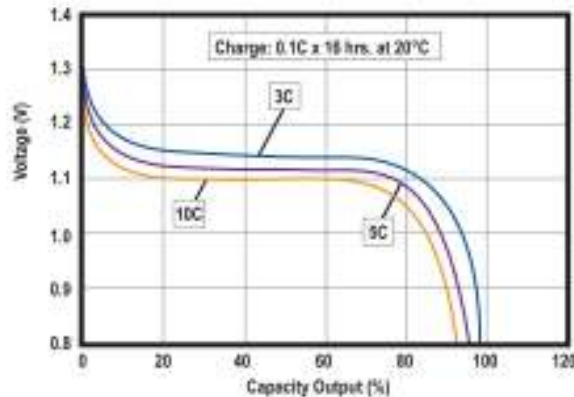

High Power Battery Discharging (3C/5C/10C)

Corporate Headquarters and Domestic Sales

Power-Sonic Corporation • 7550 Panasonic Way • San Diego, CA 92154 • U.S.A

Phone: (619) 661-2020 • Fax: (619) 661.3650

Email Sales: national-sales@power-sonic.com

Email Customer Service: customer-service@power-sonic.com

E-mail Technical Support: technical-support@power-sonic.com

International Sales

Power-Sonic Corporation • P.O. Box 5242 • Redwood City, CA 94063 • U.S.A.

Phone: (650) 364-5001 • Fax: (650) 366-3662

Email Sales: international-sales.com@power-sonic.com

www.power-sonic.com

© Copyright 2010 Power-Sonic Corporation. All rights reserved