


New
BK-10V10T

Old
(HHR-10V10T)

Infrastructure type



Dimensions

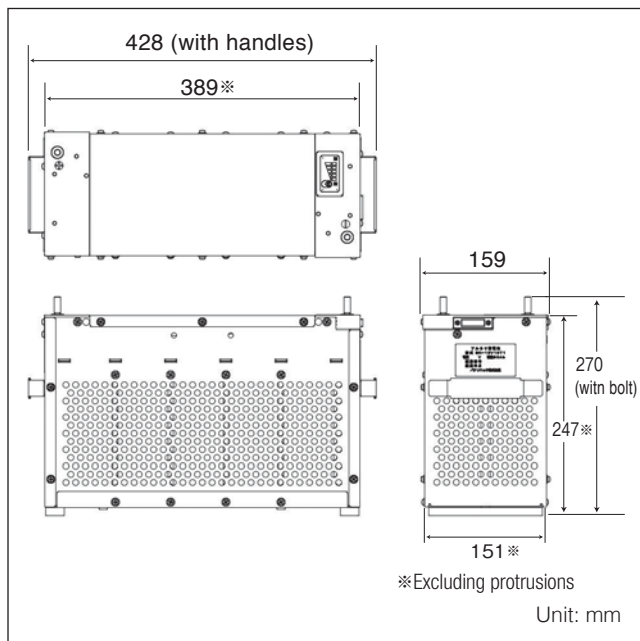

Main Specifications

| | |
|-----------------------------|--------------------------|
| Rated(battery pack) | 12 V / 90 Ah |
| Discharge current | 100 A |
| Operating temperature range | -20 °C to 60 °C |
| Dimensions(mm) | W: 428 × D: 159 × H: 270 |
| Battery cell | BK-10V1S × 10 |
| Volume | 18.4 ℓ |
| Mass | 23 kg |
| Display function | Remaining capacity |

*Specifications subject to change.
*Handle, excluding protrusions.


Exclusive battery charger

*Under battery charger development

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

Typical charge characteristics

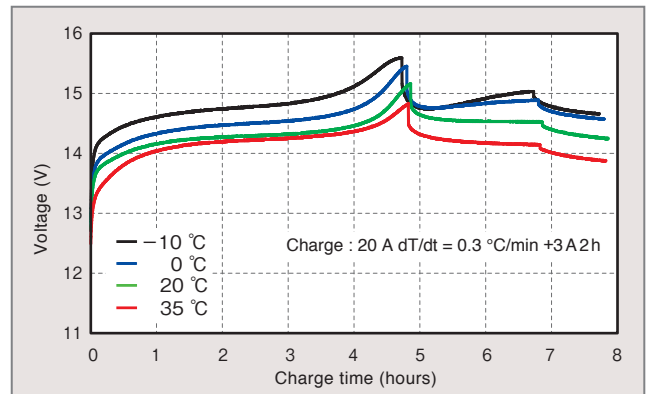

Typical discharge characteristics

