


HIGH CAPACITY K2123A CELL DATA



DIMENSIONS:

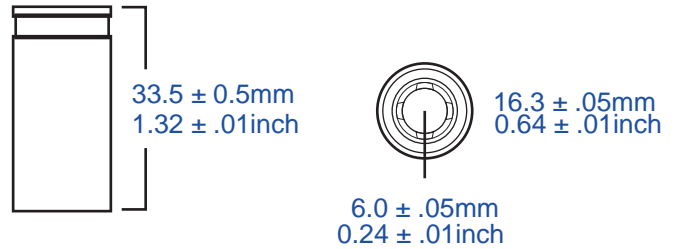

UNDOT 38.3 | RoHS Compliant

SPECIFICATIONS:

Nominal Capacity @ C/5 (mAh) 600
 Average Operating Voltage @ C/5 (V) 3.2
 Weight (g / oz) $17 \pm 2 / 0.61$

RECOMMENDED OPERATING CONDITIONS:

Continuous Discharge (A) ≤ 300
 Charge Voltage Cutoff (V) 3.65
 Charge (mA) ≤ 300
 Discharge Voltage Cutoff (V) 2.50
 High Operating Temp (°C) 60
 Low Operating Temp (°C) -20

MAXIMUM OPERATING CONDITIONS:

Continuous Discharge (mA) 1,200
 Charge (mA) 1,200
 Charge Voltage Cutoff (V) 4.2
 Discharge Voltage Cutoff (V) 2.0

AVAILABLE CHARGER

K2C3V1A CHARGER

- Compact Size
- Quick Charge Time
- DC 12V Plug



Performance may vary depending on application. All specifications and operation conditions are subject to change without notice. This data is for evaluation purposes only. No guarantee is intended or implied by this data. Rev. MDS-600021 / A

