

Battery Data Sheet Lithium (Li-MnO2)

CR-1/2AAH

1. BASIC SPECIFICATION

MODEL: CR-1/2AAH

Nominal Voltage: 3.0Volts

➤ Nominal Capacity: (5.0mA Discharge Current to 2.0V cut-off, +23 °C) 600mAh

> Standard Discharge Current: 5.0mA

Maximum recommended current under continuous discharge: 500mA

Maximum recommended current under pulse discharge: 1000mA


Operational temperature range:


➤ Nominal Weight: 10.0g

2. MAIN FEATURES

- ➤ Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- ➤ Excellent Leakage Resistance and Excellent Long-term Reliability

3. ELECTRICAL CHARACTERISTICS

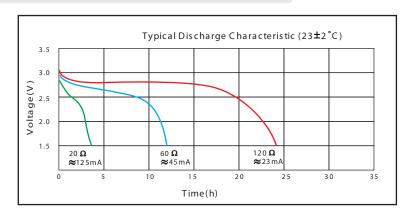



-40C~+85C

4. W ARNING!

- ➤ DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- > Keep this battery out of the reach of children.
- ➤ When storing the battery or thro wing itaway, be sure to cover it withtape.