

Drypower

RECHARGEABLE SEALED LEAD ACID BATTERY

Supplier of Energy

12SB30P 12Volt 30Ah

Specifications

Nominal Voltage(V)	12V
--------------------	-----

Nominal Capacity

20 hour rate	(1.5A to 10.50V)	30Ah
10 hour rate	(2.85A to 10.50V)	28.5Ah
5 hour rate	(5.1A to 10.20V)	25.5Ah
1 C	(30A to 9.60V)	17.0Ah
3 C	(90A to 9.60V)	12.0Ah

Weight	Approx. 10.1kg(22.2Lbs.)
--------	--------------------------

Internal Resistance (at 1KHz)	Approx. 9 mΩ
-------------------------------	--------------

Maximum Discharge Current for

5 seconds:	600A
------------	------

Charging Methods at 25 (77)

Cycle use:

Charging Voltage	14.4 to 15.0V
------------------	---------------

Coefficient -5.0mv/ /cell

Maximum Charging Current :	9A
----------------------------	----

Standby use:

Float Charging Voltage	13.50 to 13.80V
------------------------	-----------------

Coefficient -3.0mv/ /cell

Operating Temperature Range

Charge	-15 (5) to 40 (104)
Discharge	-15 (5) to 50 (122)
Storage	-15 (5) to 40 (104)


Charge Retention (shelf life) at 20 (68)

1 month	92%
3 month	90%
6 month	80%

Case Material	ABS
---------------	-----



(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal	F3
----------	----


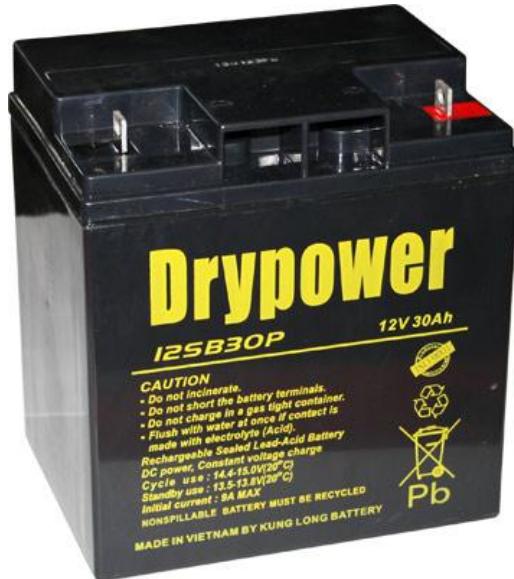


Dimensions



mm(inch)

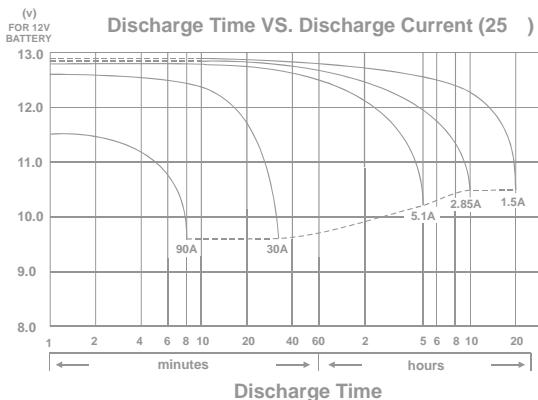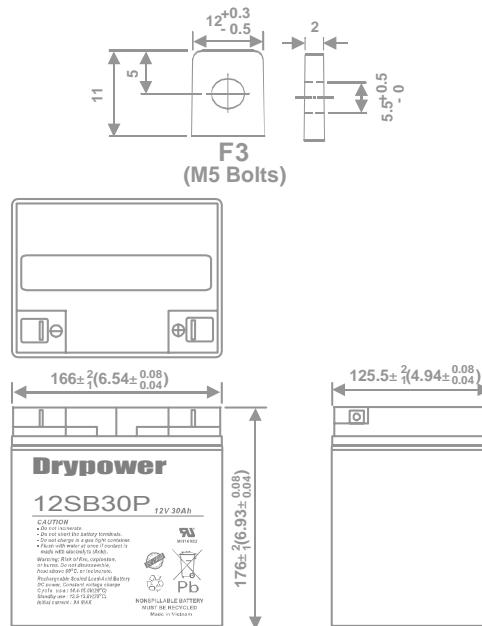

Effect of Temperature on Capacity 25 (77)

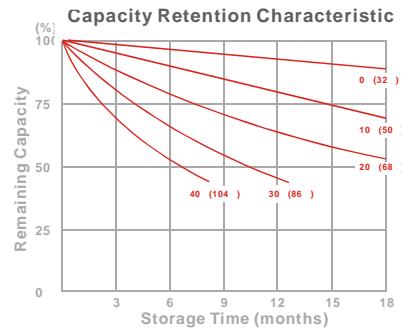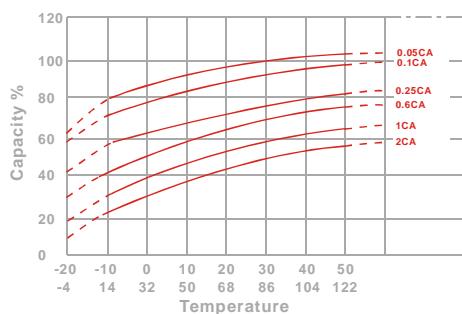

Trickle (or float) Service Life

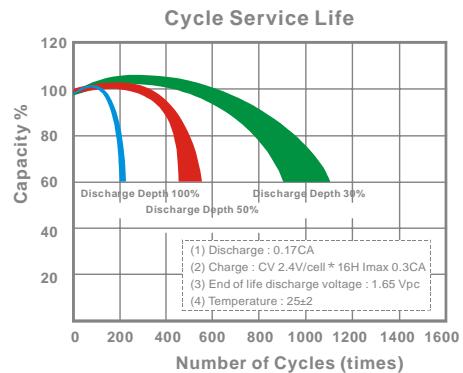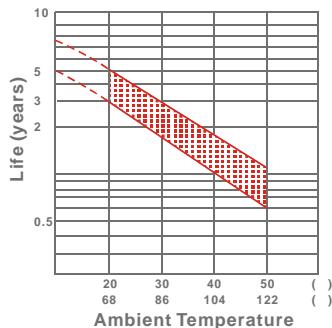

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V				
		5	10	15	30	60	120	180	240	300	600	1200
5	min	843	1064	1188	1257	1280	1302	1331	919	715	408	245
10	min	646	743	808	855	879	895	905	702	715	404	245
15	min	566	631	660	687	694	702	715	404	408	245	144
30	min	350	378	390	399	401	404	408	242	245	144	103
60	min	206	222	231	237	239	242	245	142	144	103	83.8
120	min	122	130	135	139	140	142	144	82.4	82.9	102	83.8
180	min	92.7	96.3	98.5	100	101	102	103	82.4	82.9	102	103
240	min	76.2	79.5	80.8	81.9	82.4	82.9	83.8	68.3	69.0	102	103
300	min	62.5	65.4	66.6	72.9	67.8	68.3	69.0	38.3	38.7	38.3	38.7
600	min	34.8	36.1	37.0	37.8	38.0	38.3	38.7	20.6	20.8	38.3	38.7
1200	min	18.8	19.5	20.0	20.3	20.4	20.6	20.8	-	-	-	-

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V				
		5	10	15	30	60	120	180	240	300	600	1200
5	min	75.3	96.7	110	118	121	124	128	81.0	61.4	34.5	20.4
10	min	56.4	65.5	71.8	77.0	78.8	81.0	83.4	61.4	62.7	34.9	11.9
15	min	48.6	54.4	57.1	59.7	60.6	61.4	62.7	34.1	34.5	34.9	8.46
30	min	29.3	31.8	32.9	33.8	34.1	34.5	34.9	20.0	20.2	20.4	6.74
60	min	16.9	18.3	19.2	19.8	20.0	20.2	20.4	11.7	11.8	11.9	6.81
120	min	10.4	10.9	11.3	11.6	11.7	11.8	11.9	6.70	6.74	6.81	3.14
180	min	7.51	7.83	8.04	8.21	8.28	8.35	8.46	5.59	5.63	5.68	2.81
240	min	6.12	6.41	6.54	6.66	6.70	6.74	6.81	3.06	3.11	3.14	1.52
300	min	5.09	5.34	5.46	5.55	5.59	5.63	5.68	3.08	3.11	3.14	1.57
600	min	2.81	2.92	3.00	3.06	3.08	3.11	3.14	1.64	1.65	1.67	1.69
1200	min	1.52	1.57	1.61	1.64	1.65	1.67	1.69	-	-	-	-

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min <X<10min(+12%~-12%), 10min <X<60min(+8%~-8%), X>60min(+5%~-5%)

261112-1C